





G-450 - Red-U-Bolt®, Clip Crosby Clips, all sizes 1/4" and larger, meet the performance requirements of Federal Specification FF-C-450E TYPE 1 CLASS 1, except for those provisions required of the contractor.

- Each base has a Product Identification Code (PIC) for material traceability, the name CROSBY or CG, and a size forged into it.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 1/8" through 7/8" sizes, and 90% for sizes 1" through 3-1/2".
- Entire Clip is Galvanized to resist corrosive and rusting action.
- Sizes 1/8" through 2-1/2" and 3" have forged bases.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Clip sizes up through 1-1/2" have rolled threads.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Look for the Red-U-Bolt®, your assurance of Genuine Crosby Clips.

G-450 Crosby Clips

Rope Size		G-450 Stock No.	Std. Package Qty.	Weight Per 100 (lb)	Dimensions (in)							
(in)	(mm)				A	B	C	D	E	F	G	H
1/8	3-4*	1010015	100	6	0.22	0.72	0.44	0.47	0.37	0.38	0.81	0.99
3/16*	5*	1010033	100	10	0.25	0.97	0.56	0.59	0.50	0.44	0.94	1.18
1/4	6-7	1010051	100	19	0.31	1.03	0.50	0.75	0.66	0.56	1.19	1.43
5/16	8	1010079	100	28	0.38	1.38	0.75	0.88	0.73	0.69	1.31	1.66
3/8	9-10	1010097	100	48	0.44	1.50	0.75	1.00	0.91	0.75	1.63	1.94
7/16 - 1/2	11-13	1010131	50	80	0.50	1.88	1.00	1.19	1.13	0.88	1.91	2.28
9/16 - 5/8	14-16	1010177	50	110	0.56	2.25	1.25	1.31	1.34	0.94	2.06	2.50
3/4	18-20	1010195	25	142	0.62	2.75	1.44	1.50	1.39	1.06	2.25	2.84
7/8	22	1010211	25	212	0.75	3.12	1.62	1.75	1.58	1.25	2.44	3.16
1	24-26	1010239	10	252	0.75	3.50	1.81	1.88	1.77	1.25	2.63	3.47
1 - 1/8	28-30	1010257	10	283	0.75	3.88	2.00	2.00	1.91	1.25	2.81	3.59
1-1/4	32-34	1010275	10	438	0.88	4.44	2.22	2.34	2.17	1.44	3.13	4.13
1-3/8	36	1010293	10	442	0.88	4.44	2.22	2.34	2.31	1.44	3.13	4.19
1-1/2	38	1010319	10	544	0.88	4.94	2.38	2.59	2.44	1.44	3.41	4.44
1-5/8	41-42	1010337	Bulk	704	1.00	5.31	2.62	2.75	2.66	1.63	3.63	4.75
1-3/4	44-46	1010355	Bulk	934	1.13	5.75	2.75	3.06	2.92	1.81	3.81	5.24
2	48-52	1010373	Bulk	1300	1.25	6.44	3.00	3.38	3.03	2.00	4.44	5.88
2-1/4	56-58	1010391	Bulk	1600	1.25	7.13	3.19	3.88	3.19	2.00	4.56	6.38
2-1/2	62-65	1010417	Bulk	1900	1.25	7.69	3.44	4.13	3.69	2.00	4.69	6.63
**2-3/4	**68-72	1010435	Bulk	2300	1.25	8.31	3.56	4.38	4.88	2.00	5.00	6.88
3	75-78	1010453	Bulk	3100	1.50	9.19	3.88	4.75	4.44	2.38	5.31	7.61
**3-1/2	**85-90	1010426	Bulk	4000	1.50	10.75	4.50	5.50	6.00	2.38	6.19	8.38

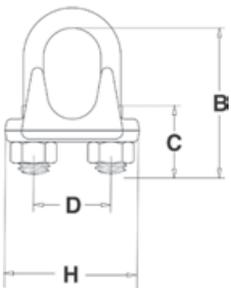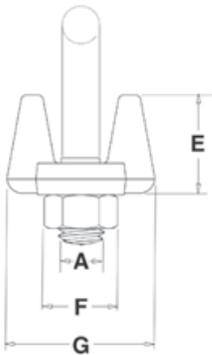

* Electro-plated U-Bolt and Nuts. ** 2-3/4" and 3-1/2" base is made of cast steel.



**G-429 - First Grip®, Clip
3/16" - 5/8"**



**G-429 - First Grip®, Clip
3/4" - 1-1/2"**

- Entire clip is Galvanized to resist corrosive and rusting action.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 3/16" through 7/8" sizes, and 90% for sizes 1" through 1-1/2"
- Bolts are an integral part of the saddle. Nuts can be installed in such a way as to enable the operator to swing the wrench in a full arc for fast installation.
- All sizes have forged steel saddles.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Assembled with standard heavy hex nuts.



Fist Grip® wire clips meet or exceed the performance requirements of Federal Specification FF-C-450E Type III, Class 1, except for those provisions required of the contractor.

G-429 First Grip® Clips



Rope Size		G-429 Stock No.	Std. Package Qty.	Weight Per 100 (lb)	Dimensions (in)				
(in)*	(mm)				C	D	E	G	N
3/16" - 5/8"	3/16 - 1/4	1010471	100	23	0.40	0.94	0.38	1.41	1.44
	5/16	1010499	100	28	0.47	1.06	0.38	1.50	1.54
	3/8	1010514	50	40	0.51	1.06	0.44	1.84	1.78
7/16" - 1/2"	7/16 - 1/2	1010532	50	62	0.59	1.25	0.50	2.21	2.15
	9/16 - 5/8	1010550	50	103	0.72	1.50	0.63	2.72	2.57
	3/4	1010578	25	175	0.86	1.81	0.75	2.94	2.67
	7/8	1010596	25	225	0.97	2.12	0.75	3.31	2.86
	1	1010612	10	300	1.13	2.25	0.75	3.72	3.06
1 - 1/8"	1 - 1/8	1010630	10	400	1.28	2.38	0.88	4.22	3.44
	1-1/4	1010658	10	400	1.34	2.50	0.88	4.25	3.56
1-3/8" - 1-1/2"	36-40	1010676	Bulk	700	1.56	3.00	1.00	5.56	4.12

*Sizes through 5/8" incorporate New Style Design

3-16" - 5/8"

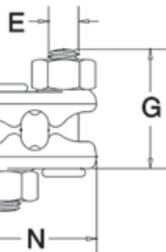

3/4" - 1-1/2"

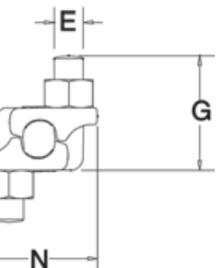

**WIRE ROPE CLIPS
TRAINING VIDEO**
CROSBY G-450 & G-429



youtube.com/thecrosbygroup

